



Vidalı Miller

Hassas Ovalanmış Miller



FSC Tip Somunlar

FSC (DIN 69051 Part 5)

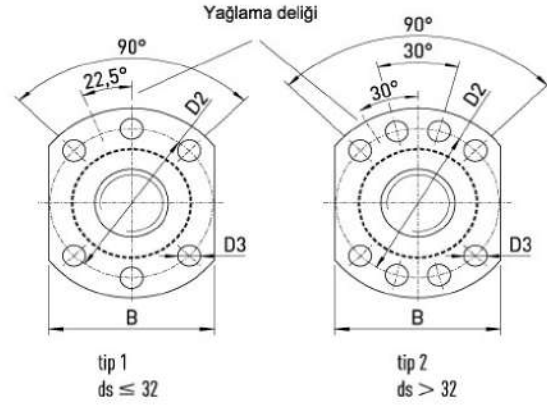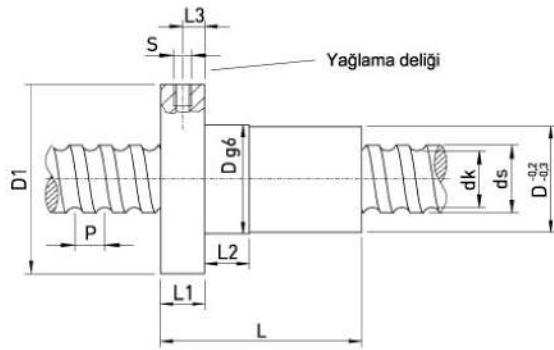

Seri	ds ±0,1	P	D g6	D1	D2	D3	Tip	L	L1	L2	L3	S	B	dk	Din yük C _{dyn} [N]	Sta. yük C ₀ [N]	Eksenel boşluk max. [mm]	Ağır. [kg/pc.]
R20-10K3-FSC	19,3	10	36	58	50	6,6	1	48	10	10	5	M6	44	16,6	10000	23500	0,04	0,32
R20-20K2-FSC	19,5	20	36	58	50	6,6	1	57	10	10	5	M6	44	17,1	6800	15300	0,04	0,36
R25-25K2-FSC	24,7	25	40	62	51	6,6	1	70	10	16	5	M6	48	22,1	7400	19100	0,04	0,43
R32-10K5-FSC	31,8	10	58	87	72	9,0	1	77	14	10	6	M6	77	28,6	31500	80100	0,04	1,02
R32-20K4-FSC	31,8	20	58	87	72	9,0	1	107	14	25	7	M6	69	28,6	22600	64600	0,04	1,02
R32-32K2-FSC	31,9	32	50	80	65	9,0	1	88	12	20	6	M6	62	28,7	11600	31800	0,04	1,20
R40-10K6-FSC	37,8	10	70	100	85	9,0	2	93	14	20	7	M8 × 1	75	32,8	67500	184500	0,07	1,25
R40-20K4-FSC	37,8	20	65	93	78	9,0	2	108	14	25	7	M8 × 1	70	32,8	46400	120000	0,07	1,45
R40-40K2-FSC	37,8	40	70	100	85	9,0	2	102	14	25	7	M8 × 1	75	32,9	23000	58400	0,07	1,60
R50-10K6-FSC	47,9	10	82	118	100	11,0	2	90	16	25	8	M8 × 1	92	42,9	74500	250000	0,07	2,20
R50-20K5-FSC	48	20	75	110	93	11,0	2	132	18	25	9	M8 × 1	85	42,9	67200	217500	0,07	2,50