

Standart Normlara Uygun DIN 8187


Tek Sıralı Zincirler BS Avrupa Serisi

DIN ISO Nr.	p mm.	b ₁ mm. min.	b ₂ mm. max.	d ₁ mm. h9	d ₃ mm. max.	F ₁ mm. max.	F ₂ mm. max.	h mm. max.	Zincir Çekme Kuvveti	Zincir Kopma Yükü	Zincir Kg/m Ağırlığı
04B-1	6	2.80	4.10	1.85	4.00	7.4	10.3	5.00	0.07	3000	0.12
05B-1	8	3.00	4.77	2.31	5.00	8.6	11.7	7.11	0.11	4600	0.18
06B-1	9.525	5.72	8.53	3.28	6.35	13.5	16.8	8.26	0.28	9100	0.41
081-1	12.7	3.30	5.80	3.66	7.75	10.2	11.7	9.91	0.21	8200	0.28
084-1	12.7	4.88	8.80	4.09	7.75	14.8	16.3	11.15	0.35	16000	0.59
08B-1	12.7	7.75	11.30	4.45	8.51	17.0	20.9	11.81	0.50	18200	0.70
10B-1	15.875	9.65	13.28	5.08	10.16	19.6	23.7	14.73	0.67	22700	0.90
12B-1	19.05	11.68	15.62	5.72	12.07	22.7	27.3	16.13	0.89	29500	1.25
16B-1	25.4	17.02	25.42	8.28	15.88	36.1	41.5	21.08	2.10	58000	2.70
20B-1	31.75	19.56	29.01	10.19	19.05	43.2	49.3	26.42	2.95	95000	3.60
24B-1	38.1	25.40	37.92	14.63	25.40	53.4	60.0	33.40	5.54	170000	6.70
28B-1	44.45	30.99	46.58	15.90	27.94	65.1	72.5	37.08	7.40	200000	8.30
32B-1	50.8	30.99	45.57	17.81	29.21	67.4	75.3	42.29	8.11	260000	10.5
40B-1	63.5	38.10	55.75	22.89	39.37	82.6	92.8	52.96	12.76	360000	16.0
48B-1	76.2	45.72	70.56	29.24	48.26	99.1	109.6	63.88	20.63	560000	25.0
56B-1	88.9	53.34	81.33	34.32	53.98	117.0	126.6	77.85	27.91	834000	35.0
64B-1	101.6	60.69	92.02	39.40	63.50	131.4	140.0	90.17	36.25	1080000	60.0
72B-1	114.3	68.58	103.81	44.48	72.39	148.7	157.2	103.63	46.17	1373000	80.0

Standart Normlara Uygun DIN 8187


Tek Sıralı Zincirler ASA Amerikan Serisi

DIN ISO Nr.	ASA	p mm.	b ₁ mm. min.	b ₂ mm. max.	d ₁ mm. h9	d ₃ mm. max.	F ₁ mm. max.	F ₂ mm. max.	h mm. max.	Zincir Çekme Kuvveti	Zincir Kopma Yükü	Zincir Kg/m Ağırlığı
06C-1	35	9.525	4.77	7.47	3.58	5.08	13.2	16.5	9.05	0.27	7900	0.31
08A-1	40	12.7	7.95	11.18	3.96	7.92	17.8	21.7	12.07	0.44	14100	0.61
10A-1	50	15.875	9.53	13.84	5.08	10.16	21.8	25.9	15.09	0.70	22200	1.01
12A-1	60	19.05	12.70	17.75	5.94	11.91	26.9	31.5	18.08	1.06	31800	1.47
16A-1	80	25.4	15.88	22.61	7.92	15.88	33.5	38.9	24.13	1.79	56700	2.57
20A-1	100	31.75	19.05	27.46	9.53	19.05	41.1	47.2	30.18	2.62	88500	3.73
24A-1	120	38.1	25.40	35.46	11.10	22.23	50.8	57.4	36.20	3.94	127000	5.50
28A-1	140	44.45	25.40	37.19	12.70	25.40	54.9	62.3	42.24	4.72	172400	7.50
32A-1	160	50.8	31.75	45.21	14.27	28.58	65.5	73.4	48.26	6.50	226800	9.70
40A-1	200	63.5	38.10	54.89	19.84	39.68	80.3	90.5	60.33	10.90	353800	15.8
48A-1	240	76.2	47.63	67.82	23.80	47.63	95.5	106.0	72.39	16.10	510300	22.6

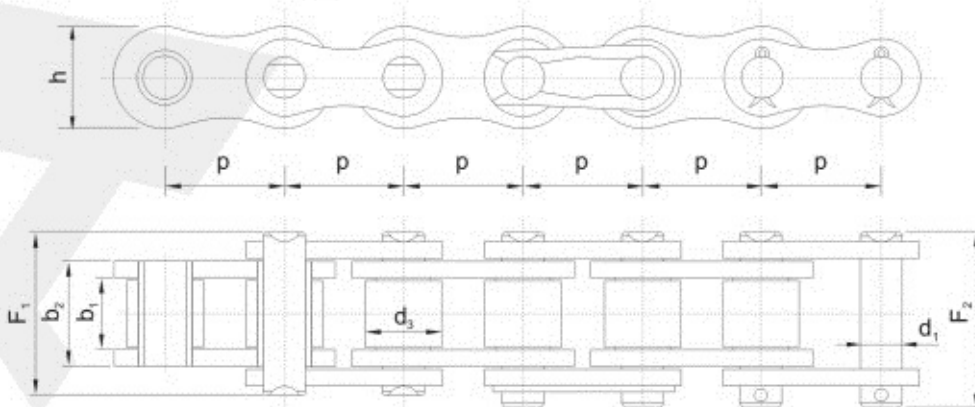

Standart Normlara Uygun DIN 8187

Çift Sıralı Zincirler BS Avrupa Serisi




DIN ISO Nr.	p mm.	b ₁ mm. min.	b ₂ mm. max.	d ₁ mm. h9	d ₃ mm. max.	F ₁ mm. max.	F ₂ mm. max.	h mm. max.	e mm.	Zincir Çekme Kuvveti	Zincir Kopma Yüğü	Zincir Kg/m Ağırlığı
05B-2	8	3.00	4.77	2.31	5.00	14.3	17.4	7.11	5.64	0.22	8000	0.36
06B-2	9.525	5.72	8.53	3.28	6.35	23.3	27.1	8.26	10.24	0.55	17300	0.78
08B-2	12.7	7.75	11.30	4.45	8.51	31.0	34.9	11.81	13.92	1.00	31800	1.35
10B-2	15.875	9.65	13.28	5.08	10.16	36.2	40.3	14.73	16.59	1.34	45400	1.85
12B-2	19.05	11.68	15.62	5.72	12.07	42.2	46.8	16.13	19.46	1.78	59000	2.50
16B-2	25.4	17.02	25.45	8.28	15.88	68.0	73.4	21.08	31.88	4.21	110000	5.40
20B-2	31.75	19.56	29.01	10.19	19.05	79.7	85.8	26.42	36.45	5.91	180000	7.20
24B-2	38.1	25.40	37.92	14.63	25.94	101.8	108.4	33.40	48.36	11.09	324000	13.5
28B-2	44.45	30.99	46.58	15.90	27.94	124.7	132.1	37.08	59.56	14.81	381000	16.6
32B-2	50.8	30.99	45.57	17.81	29.21	126.0	133.9	42.29	58.55	16.23	495000	21.0
40B-2	63.5	38.10	55.75	22.89	39.37	154.9	165.1	52.96	72.29	25.52	680000	32.0
48B-2	76.2	45.72	70.56	29.24	48.26	190.4	200.9	63.88	91.21	41.26	1000000	50.0
56B-2	88.9	53.34	81.33	34.32	53.98	223.8	232.3	77.85	106.60	55.82	1570000	70.0
64B-2	101.6	60.96	92.02	39.40	63.50	251.4	260.0	90.17	119.89	72.50	2060000	120
72B-2	114.3	68.58	103.81	44.48	72.39	285.0	293.5	103.63	136.27	92.34	2650000	160

Standart Normlara Uygun DIN 8187

Çift Sıralı Zincirler ASA Amerikan Serisi

DIN ISO ASA Nr.	p mm.	b ₁ mm. min.	b ₂ mm. max.	d ₁ mm. h9	d ₃ mm. max.	F ₁ mm. max.	F ₂ mm. max.	h mm. max.	e mm.	Zincir Çekme Kuvveti	Zincir Kopma Yüğü	Zincir Kg/m Ağırlığı	
06C-2	35	9.525	4.77	7.47	3.58	5.08	21.6	22.9	9.05	10.13	0.54	18600	0.67
08A-2	40	12.7	7.95	11.18	3.96	7.92	32.3	36.2	12.07	14.38	0.88	28200	1.19
10A-2	50	15.875	9.53	13.84	5.08	10.16	23.9	44.0	15.09	18.11	1.40	44400	1.92
12A-2	60	19.05	12.70	17.75	5.94	11.91	49.8	54.4	18.08	22.78	2.12	63600	2.90
16A-2	80	25.4	15.88	22.61	7.92	15.88	62.7	61.8	24.13	29.29	3.58	113400	5.01
20A-2	100	31.75	19.05	27.46	9.53	19.05	77.0	83.1	30.18	35.76	5.24	177000	7.31
24A-2	120	38.1	25.40	35.46	11.10	22.23	96.3	102.9	36.20	45.44	7.88	254000	10.9
28A-2	140	44.45	25.40	37.19	12.70	25.40	103.6	111.0	42.24	48.87	9.44	344800	14.4
32A-2	160	50.8	31.75	45.21	14.27	28.58	124.2	132.1	48.26	58.55	13.0	453600	19.1
40A-2	200	63.5	38.10	54.89	19.84	39.68	151.9	162.2	60.33	71.55	21.8	707600	32.0
48A-2	240	76.2	47.63	67.82	23.80	47.63	183.4	193.9	72.39	87.83	32.2	1020600	44.0

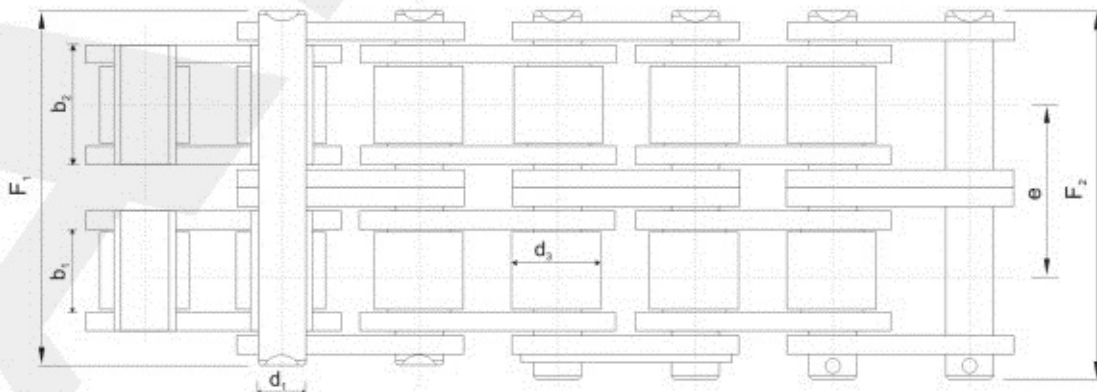



PİV VARYATOR ZİNCİR TİPLERİ

Tip A

Piv Varyatör Zincirleri

	A1	A2	A3	A4	A5	A6
HATVE	19.0	24.9	28.6	35.8	35.8	44.4
YÜKSEKLİK (t)	10	13.5	15.9	20.6	20.6	23.8
GENİŞLİK (a) "Yeni"	31	37.8	44.4	58.4	70	77.2
GENİŞLİK (a) "Kullanılmış"	28.6	35	40.6	54.5	65.2	72

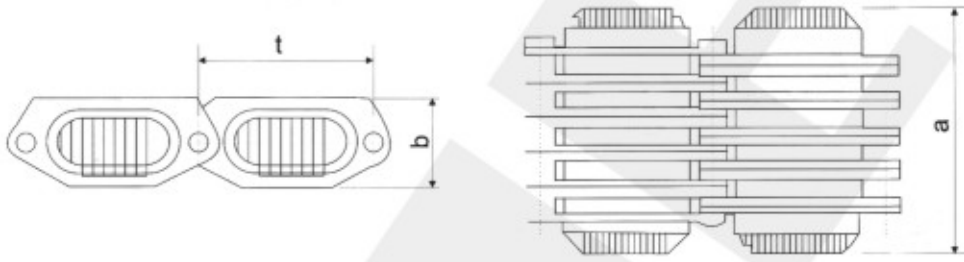


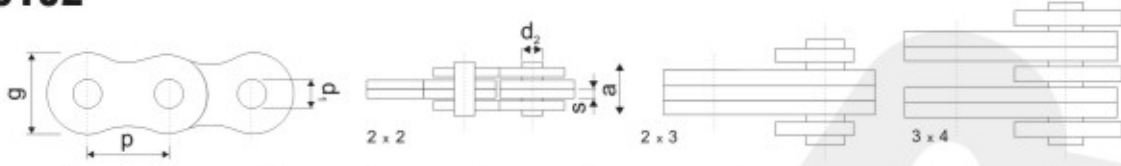DIN 8152
FLEYER ZİNCİR TIPLERİ



Pratik İfade	p	d ₁ min.	d ₂ max.	g max.	s	a max.	Zincir Çekme Kuvveti	Zincir Kopma Yükü	Zincir Kg/m Ağırlığı
LH 08-22	12.7	5.12	5.09	12.1	2	11.0	0.2	22 200	0.64
LH 08-23						13.1	0.3	22 200	0.8
LH 08-34						17.4	0.41	33 300	1.12
LH 08-44						19.5	0.41	44 400	1.28
LH 08-46						23.8	0.61	44 400	1.60
LH 08-66						28.0	0.61	66 600	1.92
LH 08-88						36.4	0.81	88 800	2.56
LH 10-22	15.875	5.98	5.96	15.1	2.4	12.9	0.28	33 400	0.88
LH 10-23						15.3	0.43	33 400	1.1
LH 10-34						20.3	0.57	50 100	1.5
LH 10-44						22.7	0.57	66 800	1.8
LH 10-46						27.7	0.86	66 800	2.2
LH 10-66						32.1	0.86	100 200	2.65
LH 10-88						42.5	1.14	133 600	3.5
LH 12-22	19.05	7.96	7.94	18.1	3.2	17.3	0.51	48 900	1.45
LH 12-23						20.7	0.76	48 900	1.8
LH 12-34						27.4	1.01	73 400	2.5
LH 12-44						30.7	1.01	97 800	2.9
LH 12-46						37.4	1.52	97 800	3.6
LH 12-66						44.2	1.52	146 800	4.3
LH 12-88						57.6	2.03	195 600	5.8
LH 16-22	25.4	9.56	9.54	24.1	3.9	21.3	0.74	84 500	2.2
LH 16-23						25.4	1.11	84 500	2.7
LH 16-34						33.7	1.49	126 800	3.8
LH 16-44						37.9	1.49	169 000	4.3
LH 16-46						46.1	2.23	169 000	5.4
LH 16-66						54.4	2.23	253 600	6.5
LH 16-88						71.0	2.97	338 000	8.6
LH 20-22	31.75	11.14	11.11	30.2	4.7	25.3	1.04	115 600	3.4
LH 20-23						30.3	1.56	115 600	4.3
LH 20-34						40.2	2.09	173 400	6.0
LH 20-44						45.1	2.09	231 200	6.9
LH 20-46						55.0	3.13	231 200	8.6
LH 20-66						65.0	3.13	346 800	10.3
LH 20-88						84.8	4.17	462 400	13.8
LH 24-22	38.10	12.71	12.71	36.2	5.5	29.6	1.40	151 200	4.6
LH 24-23						35.4	2.10	151 200	5.8
LH 24-34						47.0	2.79	226 800	8.1
LH 24-44						52.8	2.79	302 400	9.3
LH 24-46						64.5	4.19	302 400	11.6
LH 24-66						76.1	4.19	450 600	13.9
LH 24-88						99.4	5.59	604 800	18.6
LH 28-22	44.45	14.29	14.29	42.2	6.3	33.5	1.80	191 300	6.1
LH 28-23						40.1	2.70	191 300	7.6
LH 28-34						53.3	3.60	287 000	10.6
LH 28-44						59.5	3.60	382 600	12.2
LH 28-46						73.1	5.40	382 600	15.2
LH 28-66						86.3	5.40	574 000	18.2
LH 28-88						112.3	7.20	765 200	24.3
LH 32-22	50.80	17.49	17.46	48.3	7.1	39.0	2.48	289 100	8.0
LH 32-23						46.5	3.72	289 100	10.0
LH 32-34						61.7	4.96	433 700	14.0
LH 32-44						69.2	4.96	578 200	16.0
LH 32-46						84.4	7.44	578 200	20.0
LH 32-66						99.5	7.44	867 400	24.0
LH 32-88						129.8	9.92	1 156 400	32.0
LH 40-22	63.5	23.84	23.81	60.3	9.5	51.7	4.52	433 700	15.8
LH 40-23						61.7	6.78	433 700	19.8
LH 40-34						81.6	9.05	650 600	27.7
LH 40-44						91.5	9.05	867 400	31.6
LH 40-46						111.4	13.57	867 400	39.5
LH 40-66						131.3	13.57	1 301 200	47.4
LH 40-88						171.2	18.10	1 734 800	63.2

DIN 8152
FLEYER ZİNCİR TİPLERİ


4 x 4



4 x 6



6 x 6




8 x 8

Pratik İfade	p	d ₁ min.	d ₂ max.	g max.	s	a max.	Zincir Çekme Kuvveti.	Zincir Kopma Yükü	Zincir Kg/m Ağırlığı
AL 422	12.7	3.98	3.96	12	1.5	8.1	0.12	14 100	0.35
AL 444						14.5	0.23	28 200	0.67
AL 466						20.9	0.35	42 300	1.0
AL 522	15.875	5.10	5.08	15	2	10.5	0.20	22 000	0.63
AL 544						18.7	0.40	44 000	1.2
AL 586						27.1	0.60	66 000	1.75
AL 622	19.05	5.98	5.94	18	2.35	12.6	0.28	37 000	0.93
AL 644						22.5	0.57	63 600	1.6
AL 666						32.0	0.85	95 400	2.5
AL 822	25.40	7.92	7.92	24.1	3.1	17	0.50	84 520	1.6
AL 844						30.8	1.01	113 400	3.3
AL 866						44.4	1.52	170 000	4.9
AL 1022	31.75	9.55	9.53	30.1	3.9	20.6	0.76	115 650	2.4
AL 1044						37.3	1.52	177 000	4.9
AL 1066						54.0	2.29	265 500	7.3
AL 1222	38.10	11.12	11.10	36.2	4.7	24.2	1.05	151 240	3.5
AL 1244						44.2	2.10	302 470	7.0
AL 1266						63.3	3.12	381 000	10.5
AL 1422	44.45	12.72	12.70	42.2	5.6	27.8	1.40	191 270	4.33
AL 1444						51.1	2.80	382 530	8.66
AL 1466						74.5	4.2	558 000	13.00
AL 1622	50.80	14.3	14.27	48.2	6.35	31.8	1.80	214 000	6.0
AL 1644						58.4	3.60	428 000	12.0
AL 1666						85.0	5.39	642 000	18.0

LL 08-22	12.7	4.46	4.45	10.9	1.6	9.2	0.14	18 200	0.4
LL 08-44						16.0	0.28	36 400	0.8
LL 08-66						22.8	0.42	54 600	1.2
LL 10-22	15.875	5.09	5.08	13.7	1.6	9.3	0.16	22 700	0.5
LL 10-44						16.1	0.32	45 400	1.0
LL 10-66						22.9	0.48	68 100	1.5
LL 12-22	19.05	5.73	5.72	16.1	1.8	10.7	0.2	29 500	0.7
LL 12-44						18.5	0.4	59 000	1.3
LL 12-66						26.3	0.6	88 500	2.0
LL 16-22	25.4	8.29	8.28	21.1	3	17.2	0.5	58 000	1.5
LL 16-44						30.2	1.0	116 000	3.0
LL 16-66						43.2	1.5	174 000	4.4
LL 20-22	31.75	10.2	10.19	26.4	3.5	20.1	0.71	95 000	2.3
LL 20-44						35.1	1.42	190 000	4.4
LL 20-66						50.1	2.13	285 000	6.6
LL 24-22	38.10	14.65	14.63	33.4	5	28.4	1.46	170 000	4.4
LL 24-44						49.4	2.92	340 000	8.5
LL 24-66						70.4	4.38	510 000	12.5
LL 28-22	44.45	15.92	15.9	37.1	6	34.0	1.9	200 000	5.4
LL 28-44						60.0	3.81	400 000	10.5
LL 28-66						86.0	5.7	600 000	15.5
LL 32-22	50.8	17.83	17.81	42.3	6.3	35.0	2.24	260 000	6.2
LL 32-44						61.0	4.48	520 000	12.1
LL 32-66						87.0	6.72	780 000	18.0
LL 40-22	63.5	22.91	22.89	53	8	44.7	3.66	360 000	10.3
LL 40-44						77.9	7.32	720 000	20.0
LL 40-66						111.1	10.98	1 080 000	29.5
LL 48-22	76.2	29.26	29.24	63.9	10	56.1	5.85	560 000	18.5
LL 48-44						97.4	11.7	1 120 000	35.7
LL 48-66						138.9	17.55	1 680 000	53.0


KANA

ZİNCİR KESME

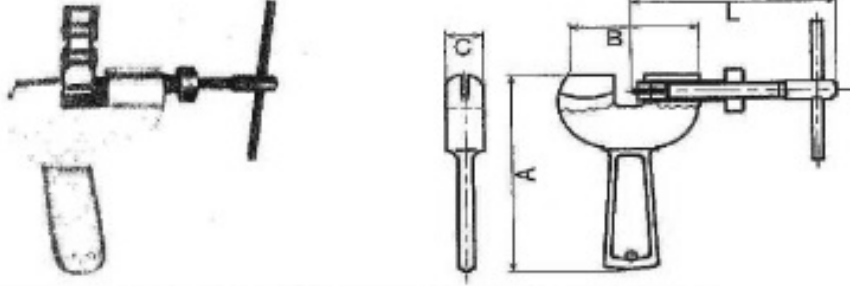


PARÇA NO	Kullanılan Zincir	A	B	C	L
NO. 4	40	141	81	20	130
NO. 5	50	145	85	21	129
NO. 6	60	153	95	24	143
NO. 8	80	154	120	26	148
NO. 10	100	180	142	38	178

ZİNCİR ÇEKME

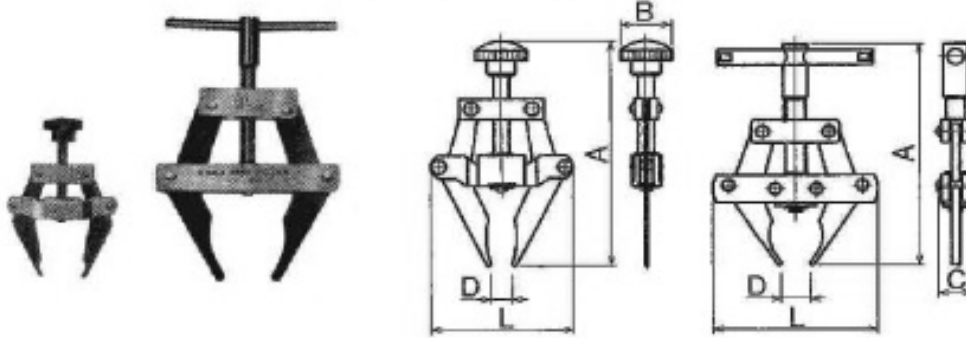

PARÇA NO	Kullanılan Zincir	A MAX	B	C	L	D
CPL 35	35 ~ 60	118	25	-	70	7 ~ 45
CPL 60	60 ~ 100	185	-	25	110	10 ~ 57
CPL 80	80 ~ 240	250	-	25	145	23 ~ 135

ZİNCİR SÖKME

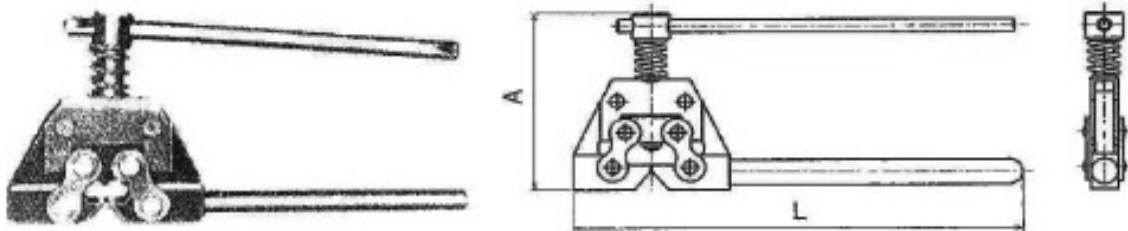

PARÇA NO	A	L
DT 60	35 ~ 60	185
DT 100	60 ~ 100	300