

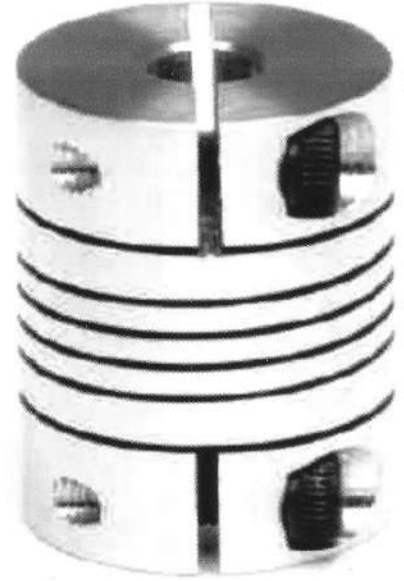
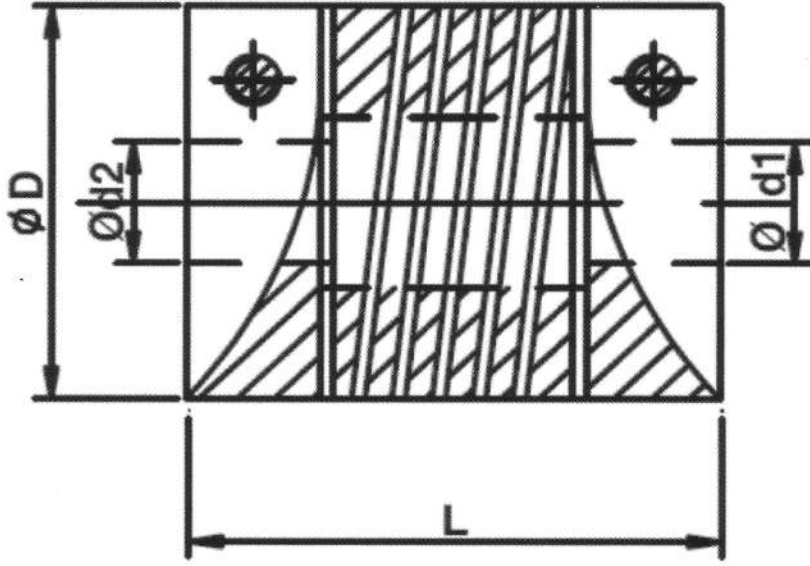
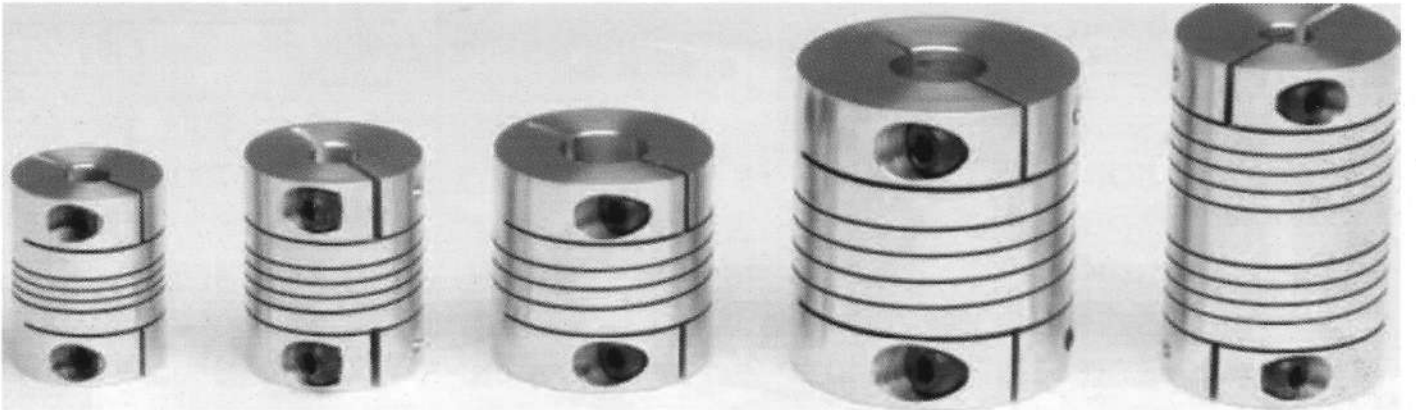


ENCODER KAPLINLER

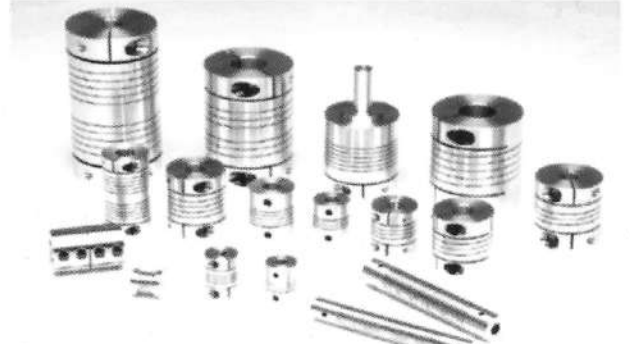


PARÇA NO	ÖLÇÜLER - mm			TORK Nm	Max.Şaft Kaçıklığı	
	d1-d2 Min.-Max.	D	L		Yatay /Dikey mm	Derece
AF 14	2-4	14	20	0.5	0.15	3
AF 16	3-6	16	24	0.6	0.15	3
AF 20	4-10	20	28	1.4	0.20	5
AF 25	5-11	25	32	2.5	0.20	5
AF 32	8-12	32	40	7	0.25	5
AF 35	10-17	35	40	8.5	0.25	5
AF 40	11-20	40	50	11	0.25	5
AF 50	12-25	50	60	25	0.25	5

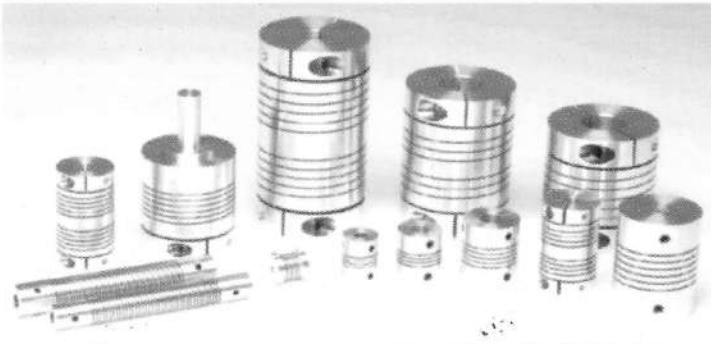



ATLIER

Rulmancılık Endüstriyel Ekipman Tic. ve San. Ltd. Şti.

BOŞLUKSUZ SERVO KAPLİNLER

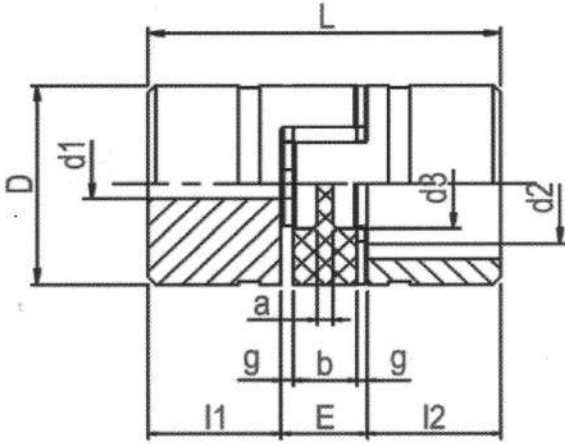

KAPLİN	ÖLÇÜLER - mm				Tork Nm	Maks. Devir
	d1-d2	D	L	l_1 / l_2		
GS 09	4-9	20	30	10	5	22500
GS 12	4-12	25	34	11	9	15000
GS 14	6-14	30	35	11	12.5	12700
GS 19	6-24	40	66	25	17	9550
GS 24	8-28	55	75	30	60	6950
GS 28	10-38	65	90	35	160	5850
GS 38	12-45	80	114	45	325	4750
GS 42	14-55	95	126	50	450	4000
GS 48	15-62	105	140	56	525	3600


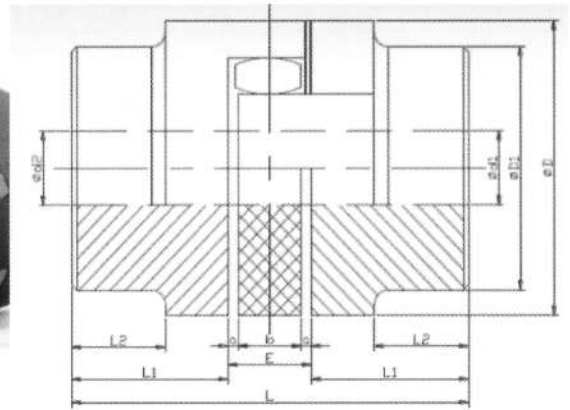
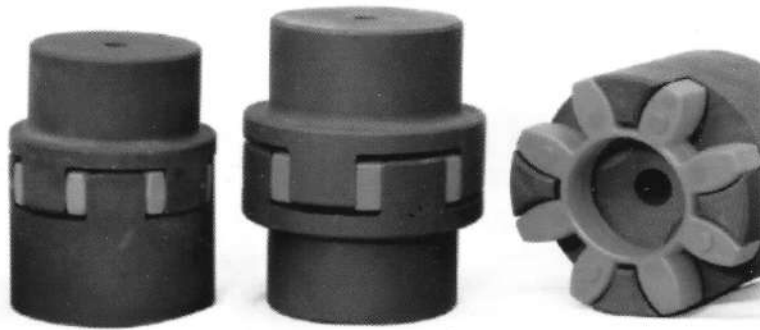


KAPLİN (Çelik)	ÖLÇÜLER - mm				Tork Nm	Maks. Devir
	d1-d2	D	L	L_1 / L_2		
GR 19	6-24	41	66	25/20	17	16700
GR 24	9-28	56	78	30/24	60	12100
GR 28	10-38	66	90	35/28	160	10100
GR 38	12-48	80	114	45/37	325	8300


ATLIER

Rulmanlık Endüstriyel Ekipman Tic. ve San. Ltd. Şti.


BOŞLUKSUZ SERVO KAPLINLER

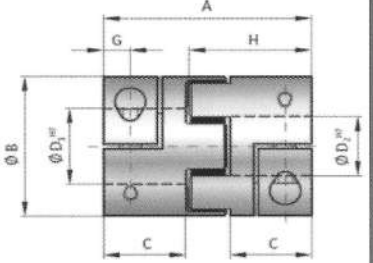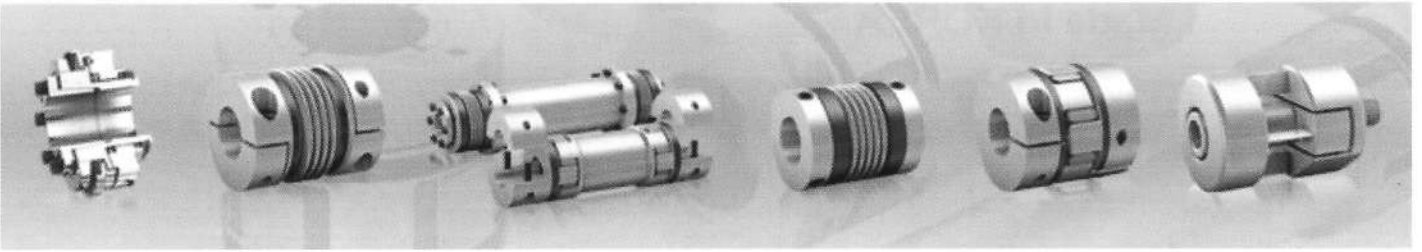

PARÇA NO	MUADİL NO	İç Çap D1-D2		Dış Çap B	Boy A	Max.Tork (Nm)	Max.Hız (rpm)
		Min	Max				
EKL 5 A	GS 9-12	4	12,7	25	26	18	22000
EKL 10 A	GS 14	4	16	32	32	25	20000
EK2/20	GS 19	5	25	42	66	34	19000
EK2/60	GS 24	8	32	56	78	120	14000
EK2/150	GS 28	10	36	66,5	90	320	11500
EK2/300	GS 38-42	12	45	82	114	650	9500
EK2/450	GS 48	20	60	102	126	1060	8000

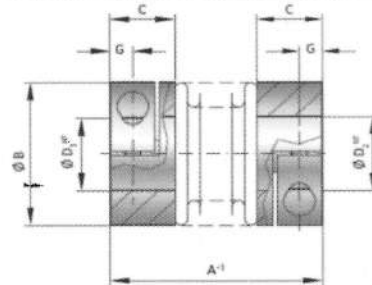

MK2/45	Toolflex 16	5	16	32	46	4,5	10000
MK2/100	Toolflex 20	8	24	40	60	10	10000



BKL 15		8	28	49	58	15	10000
BKL 30	Toolflex 30	11	32	56	68	30	10000
BKL 60	Toolflex 38	18	35	66	79	60	10000
BKL 80	Toolflex 45	16	42	82	92	80	10000
BKL150	Toolflex 45	20	42	82	92	150	10000

ATLIER

Rulmancılık Endüstriyel Ekipman Tic. ve San. Ltd. Şti.

BOSLUKSUZ SERVO KAPLINLER

PARÇA NO	İç Çap		Dış Çap	Boy	Max.Tork (Nm)	Max.Hız (rpm)
	Min	Max				
SRBM-12 C	3	5	12,7	14	0,4	20000
SRBM-16 C	3	6	16,0	16	0,8	20000
SRBM-19 C	4	8	19,1	17	1,2	19000
SRBM-22 C	5	10	22,2	20	2	17000
SRBM-26 C	5	12	26,2	23	3	15000
SRBM-32 C	6	15	31,8	30	5,2	10000

PARÇA NO	İç Çap		Dış Çap	Boy	Max.Tork (Nm)	Max.Hız (rpm)
	Min	Max				
SRB-12 C	3	5	12,7	19	0,4	12000
SRB-16 C	3	6	16,0	21,5	0,8	10000
SRB-19 C	4	8	19,1	23	1,2	8000
SRB-22 C	5	10	22,2	26,5	2	7000
SRB-26 C	5	12	26,2	31,4	3	6000
SRBA-32 C	8	15	31,8	39	5,2	5000
SRBA-39 C	10	19	39,0	43	13	4000
SRBA-49 C	12	20	49,0	63,5	26	3300
SRBA-60 C	15	25	60,0	76,2	48	2600

PARÇA NO	İç Çap		Dış Çap	Boy	Max.Tork (Nm)	Max.Hız (rpm)
	Min	Max				
SRG-16 C	3	6	16	16	0,6	9500
SRG-20 C	4	10	20	20	1	7000
SRG-25 C	5	12	25	25	2	6000
SRG-32 C	6	15	32	32	4	4700
SRG-43 C	10	22	43	41	9	4000
SRG-53 C	12	24	53	51	22	3000

PARÇA NO	İç Çap		Dış Çap	Boy	Max.Tork (Nm)	Max.Hız (rpm)
	Min	Max				
SRGL-16 C	3	6	16	22,5	0,8	9000
SRGL-20 C	4	10	20	24	1,2	7000
SRGL-25 C	5	12	25	35	2,4	6000
SRGL-32 C	6	15	32	40	4,8	4500
SRGL-43 C	10	22	43	52	10	3800
SRGL-53 C	12	24	53	66	24	2800

PARÇA NO	İç Çap		Dış Çap	Boy	Max.Tork (Nm)	Max.Hız (rpm)
	Min	Max				
SCJB-20 C	4	8	20	26,5	1	5000
SCJB-25 C	5	10	25	33,5	2	5000
SCJB-32 C	6	14	32	43	4	4500

ATLIER

Rulmancılık Endüstriyel Ekipman Tic. ve San. Ltd. Şti.

BOŞLUKSUZ SERVO KAPLİNLER



PARÇA NO	GS	İç Çap		Dış Çap	Boy	Max.Tork (Nm)	Max.Hız (rpm)
		Min	Max				
SJC14C-RD	GS 07	3	5	14	22	4	22000
SJC20C-RD	GS 09	4	8	20	30	10	11000
SJC25C-RD	GS 12	5	10	25	32,5	20	10000
SJCB30C-RD	GS 14	6	14	30	44	28	10000
SJCB40C-RD	GS 19	8	18	40	66	36	8500
SJC55C-RD	GS 24	12	28	55	78	120	6500
SJC65C-RD	GS 28	15	35	65	90	360	5500
SJC80C-RD	GS 38	15	45	80	114	640	4500
SJC100C-RD	GS 42	20	60	100	140	1200	3500



PARÇA NO	GS	İç Çap		Dış Çap	Boy	Max.Tork (Nm)	Max.Hız (rpm)
		Min	Max				
SDWB-22 C		3	8	22,2	27	2,2	10000
SDWB-31 C		5	14	31,8	38,5	6	8500
SDWB-42 C		6	17	42,5	44,2	12	8000
SDWB-47 C		8	20	47,0	51,3	20	7500
SDWB-54 C		10	25	54,0	52	44	7000
SDW-90.C		20	45	94,5	98	300	6000



PARÇA NO	GS	İç Çap		Dış Çap	Boy	Max.Tork (Nm)	Max.Hız (rpm)
		Min	Max				
SHDS-56C		10	25	56	44,2	60	7700
SHDS-66C		15	32	66	56,5	120	7000
SHDS-88C		20	45	88	69,5	200	6000
SHDW-56C		10	25	56	60,5	60	7700
SHDW-66C		15	32	66	80	120	7000
SHDW-88C		20	45	88	99,2	200	6000



PARÇA NO	GS	İç Çap		Dış Çap	Boy	Max.Tork (Nm)	Max.Hız (rpm)
		Min	Max				
SOH-16C		3	6	16	21	2	8000
SOH-20C		4	8	20	22,5	3	7000
SOH-25C		5	10	25,5	32	5	6000
SOH-32C		6	15	32	45	14	4800
SOH-43C		8	19	43	52	30	4000
SOH-53C		10	25	53	58	50	3400
SOHM-70C		18	35	73	77	130	3000